

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 035 668 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

13.09.2000 Bulletin 2000/37

(51) Int. Cl.⁷: H04B 10/08

(21) Application number: 00300897.6

(22) Date of filing: 04.02.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 12.03.1999 GB 9905718

(71) Applicant:

Marconi Communications Limited
Coventry, CV3 1HJ (GB)

(72) Inventor: Regan, Michael

Coventry CV2 4BQ (GB)

(74) Representative:

Hoste, Colin Francis
Marconi Intellectual Property
Waterhouse Lane
Chelmsford Essex CM1 2QX (GB)


Remarks:

A request for correction of the description has been filed pursuant to Rule 88 EPC. A decision on the request will be taken during the proceedings before the Examining Division (Guidelines for Examination in the EPO, A-V, 3.).

(54) Optical signal transmission system

(57) A signal transmission system uses an optical signal for carrying traffic information, and is also brightness modulated by a relatively low frequency signal. It is impractical to monitor directly the traffic information on the optical carrier for the presence of errors, and the error rate in the low frequency modulation is monitored, as its error rate is found to be indicative of traffic error.

The system uses a number of traffic-carrying optical carriers, and also a supervisory or overhead optical carrier, all of which are provided with low frequency modulations whose error rates can be monitored to provide an indication of system performance.

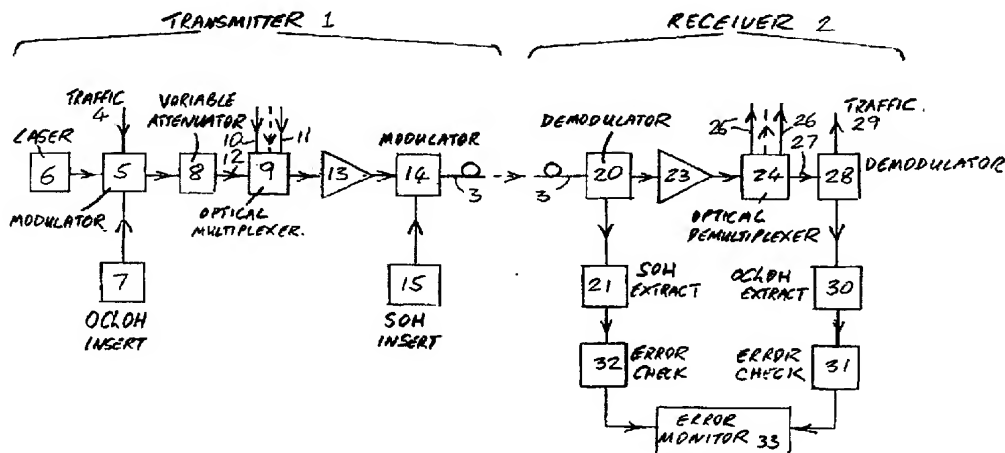

Description

[0001] This invention relates to signal transmission systems, and more particularly, to systems in which an optical carrier is used to carry traffic. The traffic represents data, including voice data, from many sources or tributaries which are multiplexed at the transmit end of a communication path into a complex electrical signal which takes advantage of the available bandwidth of the path. When the traffic is transmitted on an electrical carrier signal in a complex multiplex format, such as that known as SDH, access is, in principle, possible to the individual channels, without decompiling the entire signal, in order to monitor for the presence of errors.

[0002] In any signal transmission medium, there exists the possibility that traffic data may be corrupted, due to noise or non-linear characteristics of the system, or to malfunction of system components, and it is highly desirable to have early knowledge of data errors which can be indicative of system deterioration. For a signal transmission system in which an optical carrier is used, it is generally necessary for the data to be checked for errors at its destination, after it has been demultiplexed to electrical signals, as it is very difficult if not impossible to identify errors present in the traffic whilst it is in optical form.

[0003] The present invention seeks to provide improved error monitoring of a signal transmission system.

[0004] According to this invention, a signal transmission system having an optical carrier for carrying traffic data, includes means for monitoring optical modulation which is present on an optical carrier, means for determining errors present in the optical modulation, and utilising said errors as a measure of the likelihood of errors in said traffic data.

[0005] In any signal transmission system, it is possible for traffic data to be corrupted as it passes from one stage to the next, and it is desirable to determine a measure of the error rate which is present in, or introduced by, a particular section of a transmission system, so that if the error rate starts to become unacceptably high, that section can be shut down and traffic diverted around it whilst it is repaired or replaced. In a transmission system in which traffic data is modulated onto an optical carrier, it is very difficult to monitor the integrity of the traffic data itself on the optical carrier, and in SDH systems for example, it has been customary to monitor the traffic data for this purpose only after it has been converted back to an electrical signal format at a receiver stage. It is also desirable to determine a measure of the error rate for the end to end path as a whole.

[0006] The invention enables a measure of traffic error rates to be determined, without the need to monitor the traffic data directly.

[0007] The invention is further described by way of example with reference to the accompanying drawing which illustrates a signal transmission system in accordance with the invention.

ance with the invention.

[0008] Referring to the drawing, there is shown therein part of an optical transmission system, in which an optical carrier is transmitted from a transmitter 1 to a receiver 2 via a light guide 3, which in practice could be many kilometres in length.

[0009] Data traffic 4 is received as a complex multiplexed wideband electrical signal, for example in an SDH format, and is modulated by modulator 5 onto a narrow bandwidth optical carrier which is generated by a laser 6. Although the optical carrier is narrowband in optical terms, it is, of course, extremely wide in electrical terms.

[0010] An optical channel overhead (OChOH) signal, sometimes termed an optical path overhead (OPOH) signal is generated by an OChOH insert unit 7 and is modulated onto the optical carrier by the modulator 5. The OChOH signal typically has a bandwidth of 8 to 10kbit/s and is modulated onto a 100kHz electrical carrier. It is used for supervisory purposes and is utilised for this purpose at the receiver 2. The modulated carrier is passed through a variable attenuator 8 (which is used to control the gain of the optical system) to an optical multiplexer 9. The optical multiplexer 9 receives a number of other optical carriers 10, 11 etc. each at a different wavelength, and each of which carries traffic data in a similar manner to that for input 12 and combines them in a wave division multiplex (WDM) manner. The multiplexer 9 may also receive an unmodulated optical carrier onto which a section overhead signal is added at a later stage by modulator 14, although this unmodulated optical carrier may be added to the WDM signal between the multiplexer 9 and the modulator 14. Thus, each optical carrier 10, 11 etc. would have associated with it a laser, traffic, OChOH insert unit, modulator, and a variable attenuator, but for the sake of clarity these are not separately shown.

[0011] A wavelength division multiplexed (WDM) optical signal is thus generated by the optical multiplexer 9, and this is fed via an optical amplifier 13, in this case an erbium doped fibre amplifier, to a further modulator 14.

[0012] A section overhead signal (SOH) is generated at an SOH insert unit 15, and is modulated by modulator 14 onto the separate dedicated optical carrier which does not carry traffic and which is present in the optical WDM signal. The SOH typically has a rate of 2Mbit/s and is used for supervisory purposes.

[0013] The modulated optical carriers are transmitted over the light guide 3 and are received at the remote receiver 2, and firstly the SOH is removed at a demodulator 20 and passed to an SOH extraction unit 21. The optical carriers, all but one of which carries traffic, are passed via a further optical amplifier 22 which regenerates the optical signals, to an optical demultiplexer 24. Typically, a variable gain attenuator (not shown) would be positioned between the demodulator 20 and the amplifier 23. The optical demultiplexer 24 acts to separate the traffic data from the overhead signals.

rate out the individual optical carriers 25, 26 etc, and 27, and each is passed to separate demodulator 28, where the traffic data 29 is extracted and the OChOH signal is recovered and passed to OChOH extract unit 30.

[0014] It will be seen that an OChOH is modulated onto each of the traffic channels prior to amplification. Any noise introduced by the amplifier will therefore affect both the traffic and the OChOH, and therefore the measured performance of the OChOH as received at subsequent nodes will give an indication of performance of the traffic.

[0015] The modulation index of the OChOH is chosen to be lower than the modulation index of the traffic, such that the error rate expected on the OChOH is related to the error rate expected on the traffic approximately in proportion to the relative bandwidth. Performance error monitoring at error check unit 31 is done on the OChOH by means of comparison of repeated inverted bytes. Modelling has indicated that the use of a low data rate for the OChOH (typically 8 to 10kbit/s) does not invalidate performance statistics generated from it. Persistency checks are run on the number of consecutive degraded/severely errored seconds required to enter the degrade/unavailable condition.


[0016] The power level of the SOH is chosen such that it will start to show errors at a similar attenuation as the traffic channels. Performance error monitoring is done on the SOH by means of bit interleaved parity (BIP) checks at error check unit 32.


[0017] Thus, error measurements are performed on the SOH signal by error check unit 32, and on the OChOH signal by error check unit 31. These error measurements give direct performance indicators only of the photonics layer, ie the optical carriers, and not the data traffic itself. However, the error rate detected in these signals is closely representative of errors in the data traffic, and by monitoring the detected errors by an error monitor 33, problems in the signal transmission system can be identified and dealt with.

Claims

1. A signal transmission system having an optical carrier for carrying traffic data including means for monitoring optical modulation which is present on an optical carrier, means for determining errors present in the optical modulation, and utilising said errors as a measure of the likelihood of errors in said traffic data.
2. A system as claimed in Claim 1, and wherein the bandwidth of the optical modulation is lower than that of traffic data carried by the system.
3. A system as claimed in Claim 2 and wherein the optical modulation is present on a carrier which has a frequency which is lower than that of the traffic data carried by the system.

4. A system as claimed in any of the preceding claims, and wherein a plurality of optical carriers are provided which carry data traffic, and each of the optical carriers is modulated with a relatively low frequency envelope modulation.
5. A system as claimed in Claim 4 and wherein an additional optical carrier is provided, which does not carry data traffic, and which carries a further optical modulation.
6. A system as claimed in Claim 5 and wherein at a receiver, the presence of errors is monitored in said low frequency envelope modulation, and in said further optical modulation.
7. A system as claimed in Claim 4 and wherein means are provided for modulating said optical carriers with the low frequency envelope modulation before said optical carriers are multiplexed in a wave division multiplex format.
8. A system as claimed in Claim 5 and wherein means are provided for adding as a separate step said further optical modulation is added to said additional optical carrier in an optical path which carries the multiplexed optical carriers.

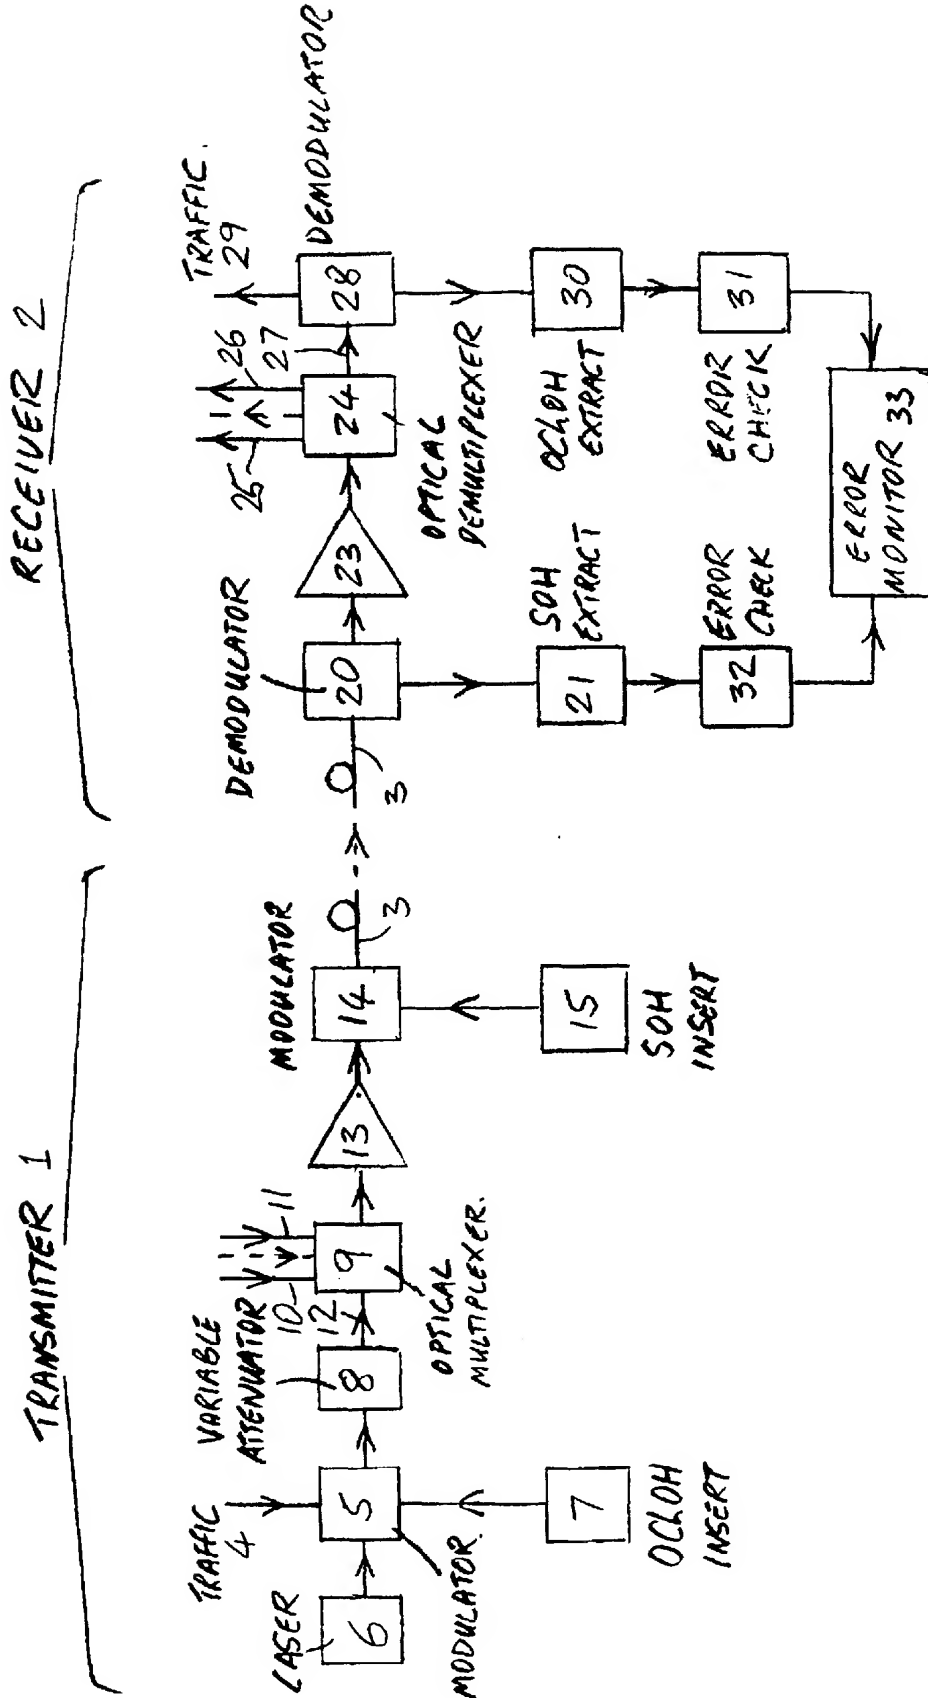



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 035 668 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
14.01.2004 Bulletin 2004/03

(51) Int Cl.7: H04B 10/08

(43) Date of publication A2:
13.09.2000 Bulletin 2000/37

(21) Application number: 00300897.6

(22) Date of filing: 04.02.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Regan, Michael**
Coventry CV2 4BQ (GB)

(74) Representative: **Hoste, Colin Francis**
Marconi Intellectual Property
Marrable House
The Vineyards
Gt. Baddow
Chelmsford Essex CM2 7QS (GB)


(30) Priority: 12.03.1999 GB 9905718

(71) Applicant: **Marconi UK Intellectual Property Ltd**
Coventry, CV3 1HJ (GB)

(54) Optical signal transmission system

(57) A signal transmission system uses an optical signal for carrying traffic information, and is also brightness modulated by a relatively low frequency signal. It is impractical to monitor directly the traffic information on the optical carrier for the presence of errors, and the error rate in the low frequency modulation is monitored,

as its error rate is found to be indicative of traffic error. The system uses a number of traffic-carrying optical carriers, and also a supervisory or overhead optical carrier, all of which are provided with low frequency modulations whose error rates can be monitored to provide an indication of system performance.

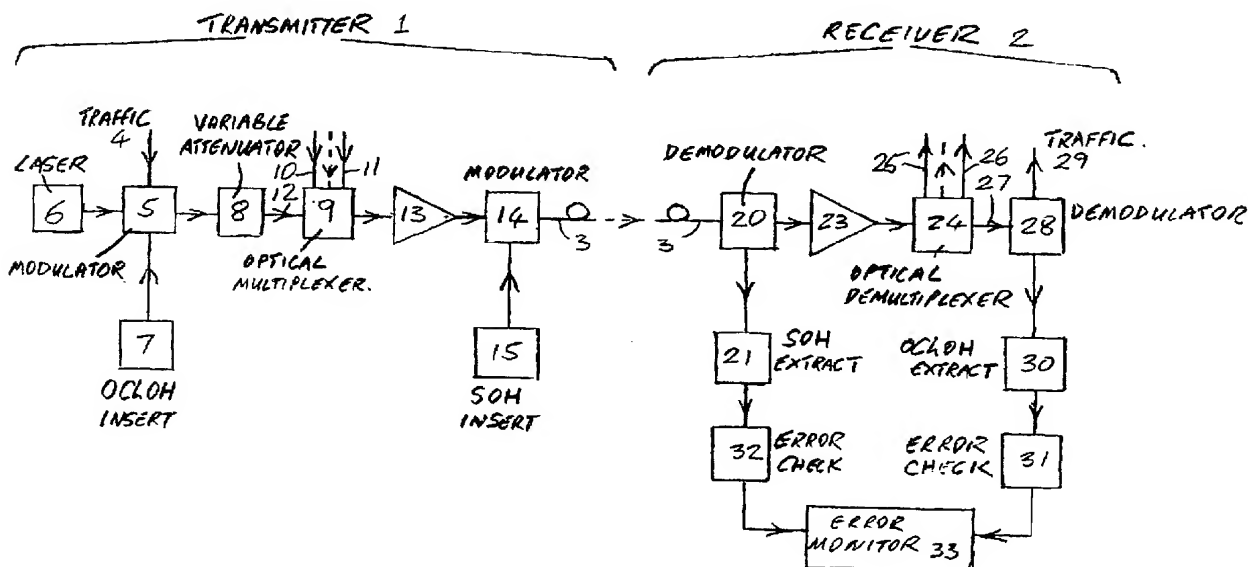

EP 1 035 668 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 0897

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 825 515 A (ANDERSON CLEO D) 20 October 1998 (1998-10-20) * column 4, line 43 - line 46 * * column 4, line 54 - line 60 * * column 6, line 4 - line 8 * * column 6, line 29 - line 34 * * column 6, line 64 - column 7, line 6 * * figures 1,2 *	1-8	H04B10/08
X	--- PATENT ABSTRACTS OF JAPAN vol. 017, no. 234 (E-1362), 12 May 1993 (1993-05-12) & JP 04 362836 A (HAMAMATSU PHOTONICS KK), 15 December 1992 (1992-12-15) * abstract *	1-8	
A	--- WO 97 48193 A (HIRST IAN JOHNSON ;STC SUBMARINE SYSTEMS LTD (GB)) 18 December 1997 (1997-12-18) * page 6, line 4 - line 10 * * page 7, line 6 - line 18 * * page 10, line 10 - line 16 * * page 14, line 1 - line 4; figure 2 *	5,6,8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04B H04J
A	--- LI C-S ET AL: "AUTOMATIC FAULT DETECTION, ISOLATION, AND RECOVERY IN TRANSPARENT ALL-OPTICAL NETWORKS" JOURNAL OF LIGHTWAVE TECHNOLOGY, IEEE. NEW YORK, US, vol. 15, no. 10, 1 October 1997 (1997-10-01), pages 1784-1793, XP000703593 ISSN: 0733-8724 * page 1789, column 2, line 18 - line 22 * * page 1790, column 1, line 17 - line 25 * --- -/--	1-8	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 24 November 2003	Examiner Muñoz Sanchez, J-M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1502 (03/02) (P04/C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 0897

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 436 750 A (KAWANO TOSHIBUMI) 25 July 1995 (1995-07-25) * abstract; figure 4 * -----	1-8	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 24 November 2003	Examiner Muñoz Sanchez, J-M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 0897

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-11-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5825515 A	20-10-1998	AU 641868 B2	30-09-1993
		AU 2204192 A	11-03-1993
		CA 2068926 A1	04-03-1993
		DE 69227613 D1	24-12-1998
		DE 69227613 T2	20-05-1999
		EP 0531047 A2	10-03-1993
		JP 2875114 B2	24-03-1999
		JP 6204949 A	22-07-1994
JP 04362836 A	15-12-1992	NONE	
WO 9748193 A	18-12-1997	GB 2314224 A	17-12-1997
		EP 0904641 A1	31-03-1999
		WO 9748193 A1	18-12-1997
		JP 2000512452 T	19-09-2000
		US 6639701 B1	28-10-2003
US 5436750 A	25-07-1995	JP 2500746 B2	29-05-1996
		JP 6097555 A	08-04-1994

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82